

CERTIFIED SOLAR SYSTEM

SUPPLIER: HTP, Inc. 272 DUCHAINE BLVD NEW BEDFORD, MA 02745 USA www.htproducts.com

In Accordance with:

SRCC Standard 300-2014-07

BRAND: SOLAR SKIES

MODEL: DB-80-40-GB

SYSTEM TYPE: Pumped, Indirect

CERTIFICATION #: 30004176

Certification:

Original

Expiration Date: January 06, 2021

January 06, 2016


The solar system listed below has been evaluated by the Solar Rating & Certification Corporation™ (SRCC™), an ISO/IEC 17065 accredited and EPA recognized Certification Body, in accordance with SRCC OG-300, Operating Guidelines for Certifying Solar Water Heating Systems, and has been certified by the SRCC. This award of certification is subject to all terms and conditions of the Program Agreement and the documents incorporated therein by reference. This document must be reproduced in its entirety.

Description: Glazed Flat Plate, Differential, -46 °C -50 °F, Water, GAMA listed gas tank, Drainback, Drainback

Single-day Rating				
Solar Energy Factor	Solar Fraction			
(SEF _D)	(SF _D)			
1.1	0.45			

Single-day Rating Conditions: SEF_D = Solar Energy Factor (info link) SF_D = Solar Fraction (info link)

SINGLE DAY RATING CONDITIONS	SI Units	Inch-Pound Units	
System Set Temperature	57.2 °C	135 °F	
Environmental Temperature	19.7 °C	67.5 °F 58 °F 58 °F 41,045 Btu/day 1,500 Btu/ft²-day	
Ambient Temperature Profile Average	14.4 °C		
Water Mains Temperature	14.4 °C		
Delivered Load	43.3 MJ/day		
Solar Irradiance	4,733 Wh/m ² -day		

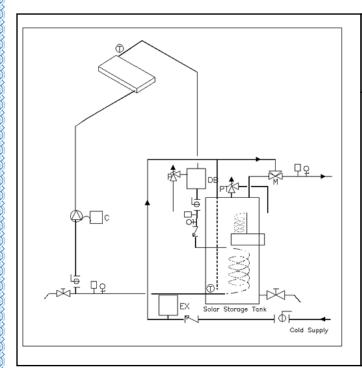

Storage Tank(s)				
Solar Tank Vol (I)	Solar Tank Vol (gal)			
303	80			
Approximate Collector Area: 3.7 m², 39.8 ft²				

The solar water system listed here has been certified by the SRCC as meeting the minimum standards for testing, installation, operation, maintenance, performance, reliability and safety as specified in SRCC Document OG-300. Thermal performance ratings are based on the successful durability and performance testing of a sample collector, where said tests have been conducted by an independent laboratory approved and listed by the SRCC. The system has been modeled using the computer simulation program TRNSYS to calculate the ratings.

Before the Supplier can make any change in design, materials, specifications, parts, or construction, the change(s) must be reported to the SRCC for evaluation of continued certification.

REMARKS:

Shawn Martin

Technical Director







SUPPLIER: HTP, Inc. 272 DUCHAINE BLVD NEW BEDFORD , MA 02745 USA www.htproducts.com

In Accordance with:

SRCC Standard 300-2014-07

BRAND: SOLAR SKIES

MODEL: DB-80-40-GB

SYSTEM TYPE: Pumped, Indirect

CERTIFICATION #: 30004176

Original Certification:

Expiration Date: January 06, 2021

January 06, 2016

The solar system listed below has been evaluated by the Solar Rating & Certification Corporation™ (SRCC™), an ISO/IEC 17065 accredited and EPA recognized Certification Body, in accordance with SRCC OG-300, Operating Guidelines for Certifying Solar Water Heating Systems, and has been certified by the SRCC. This award of certification is subject to all terms and conditions of the Program Agreement and the documents incorporated therein by reference. This document must be reproduced in its entirety.

Only the following options for the collector array are approved:

Option	Collector Panel Manufacturer	Collector Panel Request Number	Collector Panel Model Number	Collector Panel Name	Quantity	Total Panel area(m²)	Total Panel area(ft²)
1	HTP, Inc.	10001927	SS-40-FP	Solar Skies	1	3.70	39.83

Option	Collector Panel Manufacturer	Collector Panel Request Number	Collector Panel Model Number	Collector Panel Name	Quantity	Total Panel area(m²)	Total Panel area(ft²)
2	HTP, Inc.	10001974	SS-40	Solar Skies	1	3.69	39.71

